



## ON and AHEAD

# LIGHTINGS AND ACCESSORIES

## PRODUCT CATALOGUE

# Bangladesh Lamps Ltd.

Head Office: House 22, Road 04, Block F, Banani, Dhaka-1213  
Manufacturing Plant: Ghashirdia, Shashpur, Shibpur, Narshingdi-1620



## ড্রামটেক লাইটিং



 /Transtec Lighting

 [www.transteclighting.com](http://www.transteclighting.com)





ON and AHEAD



# LED BRIGHT BULB




1 YEAR  
WARRANTY

The warranty period may vary in case of any changes to the specifications

AVAILABLE COLORS

 Cool Day Light

 Warm White

Transtec Lighting



 Energy Saver
  Eco Friendly
  Best Quality
  Cost Efficient

## LED BRIGHT BULB

AVAILABLE BASE CAP

 B22
  E27

### Technical Specification

| Watt                  | 3w                                      | 5w         | 7w         | 9w         | 13w         | 15w         | 18w         |
|-----------------------|---|------------|------------|------------|-------------|-------------|-------------|
| Lumen                 | 300                                     | 500        | 700        | 900        | 1300        | 1500        | 1800        |
| Model No              | TRB 3W A55                              | TRB 5W A55 | TRB 7W A60 | TRB 9W A60 | TRB 13W A60 | TRB 15W A70 | TRB 18W A80 |
| Efficacy              | ≥100 lm/w                               |            |            |            |             |             |             |
| Beam Angle            | 230°                                    |            |            |            |             |             |             |
| Operating Voltage     | 90-265V AC, 50/60Hz                     |            |            |            |             |             |             |
| Power Factor          | ≥0.5                                    |            |            |            |             |             |             |
| Surge Protection      | 2.5KV                                   |            |            |            |             |             |             |
| Color Temperature     | Cool Day Light 6500K & Warm White 2700K |            |            |            |             |             |             |
| Color Rendering Index | ≥80%                                    |            |            |            |             |             |             |
| Life Time             | 20000 hrs                               |            |            |            |             |             |             |
| Lumen Maintenance     | ≥90% (2000 hrs)                         |            |            |            |             |             |             |

### FEATURES

- ✔ Consistent CCT output
- ✔ Surge voltage protection
- ✔ Tested 2000 Hours
- ✔ No flickering, UV/IR & Mercury free
- ✔ Lumen maintenance after 2000 Hours>90%
- ✔ Good CRI Level

### SPECIAL FEATURES

- ✔ Low Voltage Friendly
- ✔ AF Technology
- ✔ SV Protection

### APPLICATIONS

-  Home
  Office
  Outlet
  Super Market
  In All Indoor Area
  Hotel & Restaurants

# LED BACKUP BULB



The warranty period may vary in case of any changes to the specifications

AVAILABLE COLORS



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## LED BACKUP BULB

AVAILABLE BASE CAP



B22



E27

### Technical Specification

| Watt                  | 5W                   | 8W          | 10W          | 12W          |
|-----------------------|----------------------|-------------|--------------|--------------|
| Lumen                 | 500                  | 800         | 1000         | 1200         |
| Model No              | TRBK 5W A67          | TRBK 8W A67 | TRBK 10W A80 | TRBK 12W A80 |
| Backup Duration       | 2 hours+             |             |              |              |
| Efficacy              | ≥100 lm/w            |             |              |              |
| Beam Angle            | 230°                 |             |              |              |
| Operating Voltage     | 90-265V AC, 50/60Hz  |             |              |              |
| Surge Protection      | 2.5KV                |             |              |              |
| Color Temperature     | Cool Day Light 6500K |             |              |              |
| Color Rendering Index | ≥80%                 |             |              |              |
| Power Factor          | 0.5                  |             |              |              |
| Lumen Maintenance     | ≥90% (2000 hrs)      |             |              |              |

### FEATURES

- Unique design
- Easy retrofit with existing B22/E27 holders.
- High capacity Li-Ion rechargeable battery built in.
- ≥2hrs Backup time, when electricity gone.
- Over charging & over discharge protection Built-in.
- Wide operating voltage range.
- Great lumen maintenance, >90% after continuous 2000hrs burning.
- Good CCT & CRI.
- Cool Day Light 6500K
- Non-dimmable.
- Warranty – 1 year.

### APPLICATIONS



Home



Office



Outlet



Super Market



In All Indoor Area



Hotel & Restaurants



# LED GREEN BULB

**TRANSTEC**  
ON and AHEAD



**2 YEARS WARRANTY**

The warranty period may vary in case of any changes to the specifications

## AVAILABLE COLORS

-  Cool Day Light
-  Warm White



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## LED GREEN BULB

AVAILABLE BASE CAP



## Technical Specification

| Watt                  | 3W                                      | 5W         | 7W         | 9W         | 13W         | 15W         | 18W         |
|-----------------------|---|------------|------------|------------|-------------|-------------|-------------|
| Lumen                 | 300                                     | 500        | 700        | 900        | 1300        | 1500        | 1800        |
| Model No              | TRG 3W A55                              | TRG 5W A55 | TRG 7W A60 | TRG 9W A60 | TRG 13W A60 | TRG 15W A70 | TRG 18W A80 |
| Efficacy              | ≥100 lm/w                               |            |            |            |             |             |             |
| Beam Angle            | 230°                                    |            |            |            |             |             |             |
| Operating Voltage     | 90-265V AC, 50/60Hz                     |            |            |            |             |             |             |
| Power Factor          | ≥0.9                                    |            |            |            |             |             |             |
| Surge Protection      | 2.5KV                                   |            |            |            |             |             |             |
| Color Temperature     | Cool Day Light 6500K & Warm White 2700K |            |            |            |             |             |             |
| Color Rendering Index | ≥80%                                    |            |            |            |             |             |             |
| Life Time             | 25,000 hrs                              |            |            |            |             |             |             |
| Lumen Maintenance     | ≥90% (2000 hrs)                         |            |            |            |             |             |             |

## FEATURES

- Consistent CCT Output
- No flickering, UV/IR & Mercury free
- Tested 2000 Hours
- Surge voltage protection
- Good CRI Level
- 2 years warranty

## APPLICATIONS



Home



Office



Outlet



Super Market



In All Indoor Area



Hotel & Restaurants



# LED BRIGHT POWER BULB



The warranty period may vary  
in case of any changes  
to the specifications

## AVAILABLE COLORS



Cool Day Light



Warm White



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

# LED BRIGHT POWER BULB

AVAILABLE BASE CAP



B22



E27

## Technical Specification

| Watt                  | 20W                                     | 30W          | 40W          | 50W          |
|-----------------------|---|--------------|--------------|--------------|
| Lumen                 | 2000                                    | 3000         | 4000         | 5000         |
| Model No              | TRB 20W T80                             | TRB 30W T100 | TRB 40W T120 | TRB 50W T140 |
| Efficacy              | ≥100 lm/w                               |              |              |              |
| Beam Angle            | 230°                                    |              |              |              |
| Operating Voltage     | 90-265V AC, 50/60Hz                     |              |              |              |
| Power Factor          | ≥0.5                                    |              |              |              |
| Surge Protection      | >2.5KV                                  |              |              |              |
| Color Temperature     | Cool Day Light 6500K & Warm White 2700K |              |              |              |
| Color Rendering Index | ≥80%                                    |              |              |              |
| Life Time             | 25000 hrs                               |              |              |              |
| Lumen Maintenance     | >90% (2000 hrs)                         |              |              |              |

## FEATURES

- ✔ Suitable for long run
- ✔ Consistent CCT Output
- ✔ No flickering, UV/IR & Mercury free
- ✔ Lumen Maintenance after 2000 Hours 90%
- ✔ Aluminum insulation body is provided for better heat reduction
- ✔ Good CRI Level
- ✔ Surge voltage protection
- ✔ Tested 2000 Hours
- ✔ 1 year Warranty

## APPLICATIONS



Office



Outlet



Super Market



Industry



Street Market



Grocery

# LED GREEN POWER BULB



The warranty period may vary  
in case of any changes  
to the specifications

## AVAILABLE COLORS



Cool Day Light



Warm White



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## LED GREEN POWER BULB

AVAILABLE BASE CAP



B22



E27

## Technical Specification

| Watt                  | 20W                                     | 30W          | 40W          | 50W          |
|-----------------------|---|--------------|--------------|--------------|
| Lumen                 | 2000                                    | 3000         | 4000         | 5000         |
| Model No              | TRG 20W T80                             | TRG 30W T100 | TRG 40W T120 | TRG 50W T140 |
| Efficacy              | ≥110 lm/w                               |              |              |              |
| Beam Angle            | 230°                                    |              |              |              |
| Operating Voltage     | 90-265V AC, 50/60Hz                     |              |              |              |
| Power Factor          | ≥0.9                                    |              |              |              |
| Surge Protection      | 2.5KV                                   |              |              |              |
| Color Temperature     | Cool Day Light 6500K & Warm White 2700K |              |              |              |
| Color Rendering Index | ≥80%                                    |              |              |              |
| Life Time             | 25,000 hrs                              |              |              |              |
| Lumen Maintenance     | >90% (2000 hrs)                         |              |              |              |

## FEATURES

- Die-Cast Aluminum body.
- Confirms high illuminance for long.
- Wide operating voltage range.
- PF > 0.95.
- Surge voltage protection up to 2.5KV.
- No flickering.
- UV/IR, mercury free.
- Great lumen maintenance, →90% after continuous 2000 hours burning.
- Good CCT & CRI.
- Average life 25,000 hrs.
- Better energy saving compared with other conventional lighting technologies.
- Easy retrofit with existing B22/E27 holders.

## APPLICATIONS



Office



Outlet



Super Market



Industry





**TRANSTEC**  
ON and AHEAD

# LED CANDLE BLUB

**1 YEAR WARRANTY**

The warranty period may vary in case of any changes to the specifications

**AVAILABLE COLORS**

- Cool Day Light
- Warm White

5W 12W



## LED CANDLE BULB

AVAILABLE BASE CAP



B22



E27

### Technical Specification

| Watt                  | 5W                                      | 12W         | 15W         |
|-----------------------|---|-------------|-------------|
| Lumen                 | 500                                     | 1200        | 1500        |
| Model No              | TRC 5W T30                              | TRC 12W T44 | TRC 15W T55 |
| Efficacy              | ≥100                                    |             |             |
| Beam Angle            | 230°                                    |             |             |
| Operating Voltage     | 90-265V AC, 50/60Hz                     |             |             |
| Power Factor          | ≥0.5                                    |             |             |
| Surge Protection      | 2.5 KV                                  |             |             |
| Color Temperature     | Cool Day Light 6500K & Warm White 2700K |             |             |
| Color Rendering Index | ≥80%                                    |             |             |
| Life Time             | 25,000 Hrs                              |             |             |
| Lumen Maintenance     | ≥90% (2000 Hrs)                         |             |             |

### FEATURES

- Classic and decent look.
- Wide operating voltage range.
- Surge voltage protection up to 2.5KV.
- No flickering.
- UV/IR, mercury free.
- Great lumen maintenance, →90% after continuous 2000 hours burning.
- Good CCT & CRI.
- Average life 25000 hrs.
- Better energy saving compared with other conventional lighting technologies.
- Cool Day Light 6500K & Warm White options available.
- Non-dimmable.
- Easy retrofit with existing B22/E27 holders.

### APPLICATIONS



Home



Office



Outlet



Super Market



In All Indoor Area



Hotel & Restaurants

# LED LUSTER BULB



## AVAILABLE COLORS



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## LED LUSTER BULB

AVAILABLE BASE CAP



B22



E27

## Technical Specification

|          |         |         |         |         |         |         |
|----------|---------|---------|---------|---------|---------|---------|
| Watt     | 0.5W    |         |         |         |         |         |
| Model No | TR RP45 | TR GP45 | TR BP45 | TR YP45 | TR WP45 | TR OP45 |
| Color    | Red     | Green   | Blue    | White   | Yellow  | Orange  |
| Size     | P45     |         |         |         |         |         |

## FEATURES

- 95% energy Saving than GLS Luster
- Wide operating voltage: 50 V-240 V AC
- Size and shape like as GLS luster
- No mercury content, free from IR and UV radiation
- PC cover, fire retardant and breakage resistant
- Instant start, no flickering problem
- All products are in accordance with CE & ROHS standard

## SPECIAL FEATURES

-  Transtec LED Luster does not break when dropped from the hand





### Available Watt

25W 40W 60W 100W 200W



Eco Friendly



Best Quality

## GLS BULB

AVAILABLE BASE CAP



B22



E27

### Technical Specification

| Watt              | 25W         | 40W  | 60W  | 100W | 200W |
|-------------------|-------------|------|------|------|------|
| Lumen             | 220         | 350  | 630  | 1150 | 2920 |
| Size              | E-50        | E-50 | E-50 | A-55 | E-75 |
| Operating Voltage | 220-240V AC |      |      |      |      |
| Base Cap          | B22/E27     |      |      |      |      |

### FEATURES

- Contains no mercury, so environment friendly
- Emits it's rated brightness immediately
- Fuse wire is used, for more safety
- Flicker Free and instant start

### APPLICATIONS



Home



Shop



Firms



Washroom

# LED BRIGHT T8 TUBE LIGHT



The warranty period may vary  
in case of any changes  
to the specifications

## AVAILABLE COLORS



Cool Day Light



Warm White



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## LED BRIGHT T8 TUBE LIGHT

### AVAILABLE SIZE



2 Ft.



4 Ft.

## Technical Specification

| Watt                  | 10W                                     | 20W       |
|-----------------------|---|-----------|
| Lumen                 | 1000                                    | 2000      |
| Model No              | TR10WT8GB                               | TR20WT8GB |
| Size                  | 2 ft                                    | 4 ft      |
| Efficacy              | 100 lm/w                                |           |
| Beam Angle            | 230°                                    |           |
| Operating Voltage     | 100-265V AC, 50/60Hz                    |           |
| Power Factor          | ≥0.5                                    |           |
| Surge Protection      | Up to 2.5 KV                            |           |
| Color Temperature     | Cool Day Light 6500K & Warm White 2700K |           |
| Color Rendering Index | ≥80%                                    |           |
| Life Time             | 20000 hrs                               |           |
| Lumen Maintenance     | ≥90% (2000 hrs)                         |           |

## FEATURES

- Consistent CCT Output
- Good CRI Level
- Surge Voltage Protection up to 2.5 KV
- No flickering, UV/IR & Mercury free
- Lumen maintenance after 2000 Hours > 90%
- Tested 2000 Hours

## APPLICATIONS



Home



Industry



Hospital



Outlet



Hotel &  
Restaurants



Billboard



# GREEN T8 TUBE LIGHT



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## GREEN T8 TUBE LIGHT

AVAILABLE SIZE

2 Ft.

4 Ft.

### Technical Specification

| Watt                  | 10W                                     | 20W      |
|-----------------------|---|----------|
| Lumen                 | 1000                                    | 2000     |
| Model No              | TR10WT8G                                | TR20WT8G |
| Size                  | 2 Ft                                    | 4 Ft     |
| Efficacy              | 100 lm/w                                |          |
| Beam Angle            | 230°                                    |          |
| Operating Voltage     | 100-265V AC, 50/60Hz                    |          |
| Power Factor          | ≥0.90                                   |          |
| Surge Protection      | >2.5 KV                                 |          |
| Color Temperature     | Cool Day Light 6500K & Warm White 2700K |          |
| Color Rendering Index | ≥80%                                    |          |
| Life Time             | 20,000 hrs                              |          |
| Lumen Maintenance     | ≥90% (2000 hr)                          |          |

### FEATURES

- ❖ Glass Shell with G13 Pin Retrofit of fluorescent tube light.
- ❖ Light in weight, no need additional Ballast & Starter.
- ❖ Excellent luminous efficacy & extra bright light.
- ❖ Double life time compared with Fluorescent Tube Light (20,000 hours).
- ❖ Wide Input Voltage Range can do both pf > 0.90 & pf > 0.50.
- ❖ Built in surge protection save the light from high switching voltage.
- ❖ Easy maintenance.

### APPLICATIONS



Office



Showroom



Shopping Mall

Low height  
Warehouse

Class Room



Commercial Spaces



The warranty period may vary  
in case of any changes  
to the specifications

AVAILABLE COLORS




Cool Day Light




Warm White





**TRANSTEC**  
ON and AHEAD

# LED POWER TUBE LIGHT

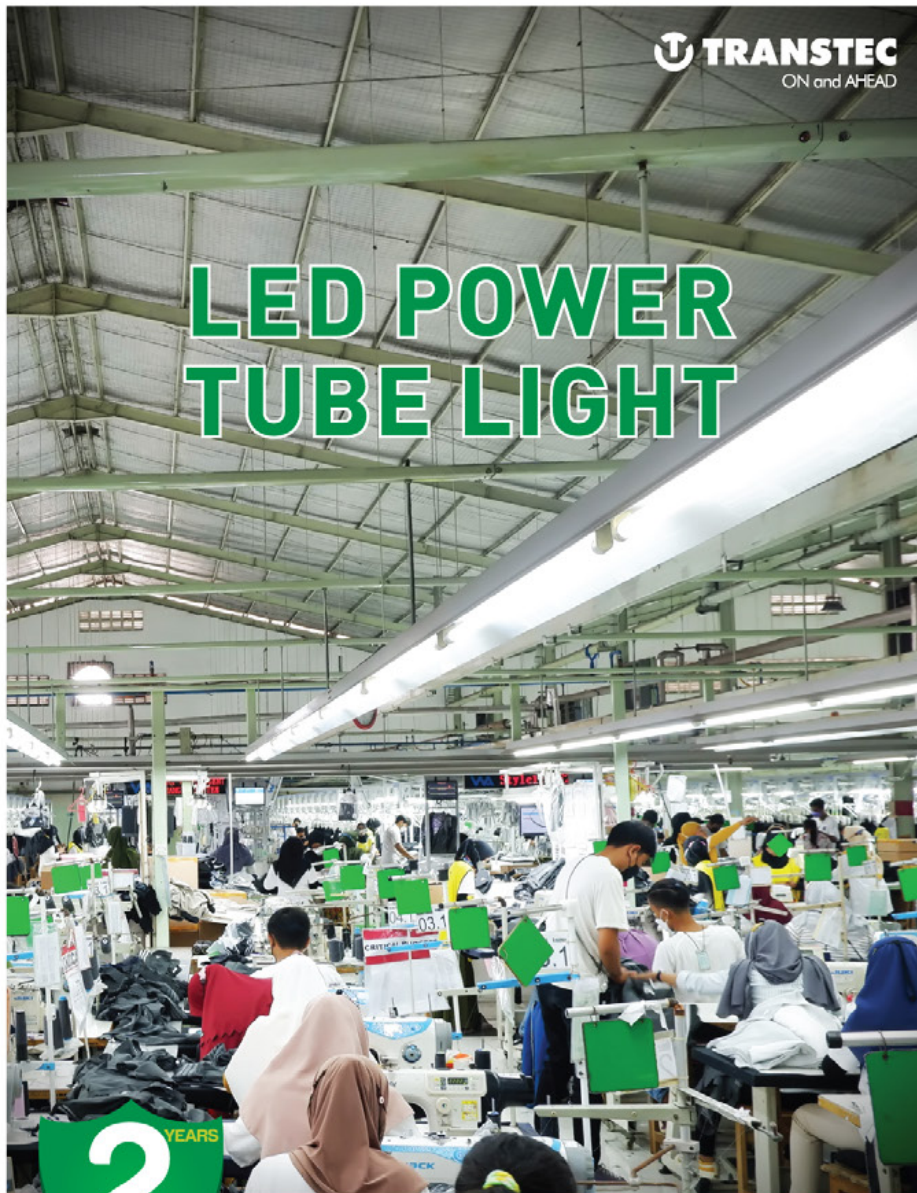


2


**YEARS**

**WARRANTY**


The warranty period may vary in case of any changes to the specifications



Cool Day Light



Warm White






**TRANSTEC**  
ON and AHEAD

  
Energy Saver

  
Eco Friendly

  
Best Quality

  
Cost Efficient

## LED POWER TUBE LIGHT

AVAILABLE SIZE

 2 Ft.

 4 Ft.

### Technical Specification

| Watt                  | 10W                                     | 20W        | 22W        |
|-----------------------|---|------------|------------|
| Lumen                 | 1000                                    | 2200       | 2600       |
| Model No              | TR 10WTBAL                              | TR 20WTBAL | TR 22WTBAL |
| Efficacy              | ≥100 lm/w                               | ≥120 lm/w  |            |
| Size                  | 2 Ft                                    | 4 Ft       |            |
| Beam Angle            | 230°                                    |            |            |
| Operating Voltage     | 85-265V AC, 50/60Hz                     |            |            |
| Power Factor          | >0.95                                   |            |            |
| Surge Protection      | >2.5KV                                  |            |            |
| Color Temperature     | Cool Day Light 6500K & Warm White 2700K |            |            |
| Color Rendering Index | ≥80%                                    |            |            |
| Life Time             | 25,000 hrs                              |            |            |
| Lumen Maintenance     | >90% (2000 hrs)                         |            |            |

### FEATURES

- 💡 Can be used 24/7
- 💡 Suitable for long run
- 💡 Consistent CCT Output
- 💡 No flickering, UV/IR & Mercury free
- 💡 Lumen maintenance after 2000 Hours >90%
- 💡 Aluminum insulation body is provided for better heat reduction
- 💡 Good CRI Level
- 💡 Surge Voltage Protection up to > 2.5 KV
- 💡 Tested 2000 hours

### APPLICATIONS

-   
Textile

  
Home

  
Office

  
Retail

  
Super Market

  
RMG

  
Commercial Spaces



# LED GREEN T5 TUBE LIGHT



The warranty period may vary in case of any changes to the specifications

## AVAILABLE COLORS



Cool Day Light



Warm White



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## LED GREEN T5 TUBE LIGHT

### AVAILABLE SIZE



1 Ft.



2 Ft.



4 Ft.

## Technical Specification

| Watt                  | 4W                                      | 10W      | 20W      |
|-----------------------|---|----------|----------|
| Lumen                 | 400                                     | 1000     | 2000     |
| Model No              | TR 4WT5                                 | TR 10WT5 | TR 20WT5 |
| Size                  | 1 Ft                                    | 2 Ft     | 4 Ft     |
| Efficacy              | ≥100 lm/w                               |          |          |
| Beam Angle            | 230°                                    |          |          |
| Operating Voltage     | 100-265V AC, 50/60Hz                    |          |          |
| Power Factor          | ≥0.5/≥0.9                               |          |          |
| Surge Protection      | >2.5KV                                  |          |          |
| Color Temperature     | Cool Day Light 6500K & Warm White 2700K |          |          |
| Color Rendering Index | ≥80%                                    |          |          |
| Life Time             | 25,000 hrs                              |          |          |
| Lumen Maintenance     | >90% (2000 hr)                          |          |          |

## FEATURES

- Easy installation, no need of any extra Batten
- Lasts more than 4 times than FTL
- 60% energy savings than fluorescent tube light
- No Additional Ballast and starter required
- Gives almost Same light after 1 year
- Can be used as linear light and mirror light (4W)
- Environment friendly: Mercury free, No UV/IR Radiations
- Glare & flicker Free
- Can connect 10 pcs in series

## APPLICATIONS



Residence



Office



Showroom



Commercial Spaces

# LED SLIM BATTEN TUBE LIGHT



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## LED SLIM BATTEN TUBE LIGHT (OVAL)



### OVAL

#### AVAILABLE SIZE

1 Ft. 2 Ft. 4 Ft.

### SQUARE

#### AVAILABLE SIZE

2 Ft. 4 Ft.

## LED SLIM BATTEN TUBE LIGHT (SQUARE)



## Technical Specification

| Watt                  | 10W                                     | 20W        | 40W        | 20W                                     | 40W        | 60W        |
|-----------------------|---|------------|------------|---|------------|------------|
| Lumen                 | 1000                                    | 2000       | 4000       | 2000                                    | 4000       | 6000       |
| Model No              | TR 10W SBO                              | TR 20W SBO | TR 40W SBO | TR 20W SBS                              | TR 40W SBS | TR 60W SBS |
| Shape                 | Oval                                    | Oval       | Oval       | Square                                  | Square     | Square     |
| Size                  | 1 Ft                                    | 2 Ft       | 4 Ft       | 2 Ft                                    | 4 Ft       | 4 Ft       |
| Efficacy              | ≥100 lm/w                               |            |            | ≥100 lm/w                               |            |            |
| Beam Angle            | 230°                                    |            |            | 230°                                    |            |            |
| Operating Voltage     | 100-265V AC, 50/60Hz                    |            |            | 100-265V AC, 50/60Hz                    |            |            |
| Power Factor          | ≥0.5                                    |            |            | ≥0.5                                    |            |            |
| Surge Protection      | 2.5KV                                   |            |            | 2.5KV                                   |            |            |
| Color Temperature     | Cool Day Light 6500K & Warm White 2700K |            |            | Cool Day Light 6500K & Warm White 2700K |            |            |
| Color Rendering Index | ≥80%                                    |            |            | ≥80%                                    |            |            |
| Life Time             | 25,000 hrs                              |            |            | 25,000 hrs                              |            |            |
| Lumen Maintenance     | >90% (2000 hrs)                         |            |            | >90% (2000 hrs)                         |            |            |

## FEATURES

- ✦ Slim & compact design.
- ✦ Wide operating voltage range.
- ✦ Both oval & square shape available.
- ✦ Uniform light distribution.
- ✦ Surge voltage protection ≥ 2.5KV
- ✦ No flickering, glare free.
- ✦ UV/IR, mercury free.
- ✦ Almost same lumen output even after using 1 year.
- ✦ Average life 25000 hours.
- ✦ Better energy saving compared to fluorescent Tube light.
- ✦ Cost effective operation.
- ✦ Cool Day Light 6500K & Warm White options available.
- ✦ Non dimmable.

## FEATURES

- ✦ 60% energy savings than fluorescent tube light
- ✦ Lasts more than 4 times than FTL
- ✦ No additional ballast and starter required
- ✦ Environment friendly: Mercury free, No UV/IR Radiations
- ✦ Gives almost same light after 1 year
- ✦ Glare & Flicker Free
- ✦ Can Be used as Linear light

## APPLICATIONS



Home



Industry



Hospital



Outlet

Hotel &  
Restaurants


**2 YEARS WARRANTY**

The warranty period may vary in case of any changes to the specifications

**AVAILABLE COLORS**

Cool Day Light Warm White

**LED SLIM BATTEN TUBE LIGHT (SQUARE)**

**LED SLIM BATTEN TUBE LIGHT (OVAL)**



# 3D+ Slim Batten Tube Light

**2** YEARS  
WARRANTY

The warranty period may vary in case of any changes to the specifications


## AVAILABLE COLORS



Cool Day Light



Warm White

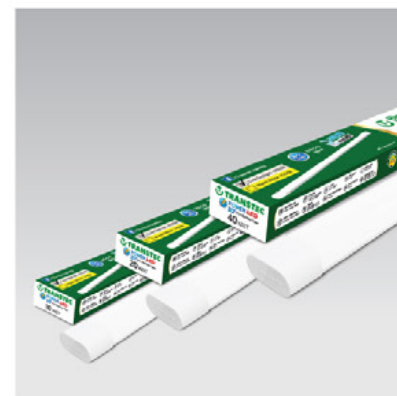

Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## 3D+ Slim Batten Tube Light

### AVAILABLE SIZE

1 Ft. 2 Ft. 4 Ft.

### Technical Specification

| Watt                  | 10W   | 20W          | 40W          |
|-----------------------|---|--------------|--------------|
| Lumen                 | 1000 lm   | 2000 lm      | 4000 lm      |
| Model No              | TR 10W 3D+SB                                    | TR 20W 3D+SB | TR 40W 3D+SB |
| Shape                 | 3D  | 3D           | 3D           |
| Size                  | 1 Ft.   | 2 Ft.        | 4 Ft.        |
| Efficacy              | ≥100 lm/w                                       |              |              |
| Beam Angle            | 230°  |              |              |
| Operating Voltage     | 100-265V AC, 50/60Hz                            |              |              |
| Power Factor          | ≥0.5  |              |              |
| Surge Protection      | 2.5KV   |              |              |
| Color Temperature     | Cool Day Light 6500K±500 & Warm White 2700K±500 |              |              |
| Color Rendering Index | ≥80%  |              |              |
| Life Time             | 20,000 Hrs                                      |              |              |
| Lumen Maintenance     | >90% (2000 Hrs)                                 |              |              |

### FEATURES

- ❖ 60% energy savings than fluorescent tube light
- ❖ Lasts more than 4 times than FTL
- ❖ No additional ballast and starter required
- ❖ Environment friendly: Mercury free, No UV/IR Radiations
- ❖ Gives almost same light after 1 year
- ❖ Glare & Flicker Free
- ❖ Can Be used as Linear light

### APPLICATIONS



Home



Industry



Hospital



Outlet



Hotel & Restaurants

# LED PANEL LIGHT



Energy Saver



Eco Friendly



Best Quality



Cost Efficient


**CONCEAL**

## LED PANEL LIGHT

AVAILABLE SHAPE

SQUARE

ROUND


**SURFACE**

### Technical Specification

#### CONCEAL

| Watt                  | 6W                                      | 9W        | 12W        | 15W        | 18W        | 24W        |
|-----------------------|---|-----------|------------|------------|------------|------------|
| Lumen                 | 440                                     | 675       | 900        | 1125       | 1350       | 1900       |
| Model No              | TR 6WR120                               | TR 9WR140 | TR 12WR170 | TR 15WR200 | TR 18WR220 | TR 24WR300 |
| Shape                 | Round/Square                            |           |            |            |            |            |
| Efficacy              | ≥75 lm/w                                |           |            |            |            | ≥80 lm/w   |
| Beam Angle            | 120°                                    |           |            |            |            |            |
| Operating Voltage     | 85-265V AC, 50/60Hz                     |           |            |            |            |            |
| Power Factor          | ≥0.9                                    |           |            |            |            |            |
| Surge Protection      | 2.5KV                                   |           |            |            |            |            |
| Color Temperature     | Cool Day Light 6500K & Warm White 2700K |           |            |            |            |            |
| Color Rendering Index | ≥80%                                    |           |            |            |            |            |
| Life Time             | 25,000 hrs                              |           |            |            |            |            |
| Lumen Maintenance     | ≥90% (2000 hrs)                         |           |            |            |            |            |

#### SURFACE

| 6W                                      | 12W        | 18W        | 24W        |
|---|------------|------------|------------|
| 640                                     | 900        | 1350       | 1900       |
| TR 6WS120                               | TR 12WS170 | TR 18WS220 | TR 24WS300 |
| Round/Square                            |            |            |            |
| 75 lm/w                                 |            |            | 80 lm/w    |
| 120°                                    |            |            |            |
| 85-265V AC, 50/60Hz                     |            |            |            |
| ≥0.9                                    |            |            |            |
| 2.5KV                                   |            |            |            |
| Cool Day Light 6500K & Warm White 2700K |            |            |            |
| ≥80%                                    |            |            |            |
| 25,000 hrs                              |            |            |            |
| ≥90% (2000 hrs)                         |            |            |            |

### FEATURES

- Easy to install
- Consistent CCT Output
- No flickering, UV/IR & Mercury free
- Lumen maintenance after 2000 Hours → 90%
- Slim & modern design
- Good CRI Level
- Surge voltage protection
- Tested 2000 Hours

### APPLICATIONS



Office



Home



Industry



Hospital



Outlet


Hotel &  
Restaurants

Commercial  
Spaces


Showroom

The warranty period may vary  
in case of any changes  
to the specifications



Cool Day Light



Warm White

#### AVAILABLE COLORS


**CONCEAL**

**SURFACE**



# LED BRIGHT PANEL LIGHT



The warranty period may vary  
in case of any changes  
to the specifications

## AVAILABLE COLORS



Cool Day Light



Warm White



**SURFACE**



**CONCEAL**



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## LED BRIGHT PANEL LIGHT (SURFACE)



## LED BRIGHT PANEL LIGHT (CONCEAL)



### AVAILABLE SHAPE

SQUARE

ROUND

## Technical Specification

### SURFACE

| Watt                  | 12W   | 18W      | 24W  |
|-----------------------|---|----------|------|
| Lumen                 | 1080  | 1620     | 2160 |
| Shape                 | Round/Square                                    |          |      |
| Efficacy              | >85 lm/w  | >90 lm/w |      |
| Beam Angle            | 230°  |          |      |
| Operating Voltage     | 90-270V AC, 50/60Hz                             |          |      |
| Surge Protection      | 2.5KV   |          |      |
| Color Temperature     | Cool Day Light 6500K±500 & Warm White 2700K±500 |          |      |
| Color Rendering Index | ≥80%  |          |      |
| Life Time             | 20,000 Hrs                                      |          |      |
| Lumen Maintenance     | >90% (2000 Hrs)                                 |          |      |

### CONCEAL

| 7W  | 12W  | 18W      | 24W  |
|---|------|----------|------|
| 630   | 1080 | 1620     | 2160 |
| Round/Square                                    |      |          |      |
| >85 lm/w  |      | >90 lm/w |      |
| 230°  |      |          |      |
| 90-270V AC, 50/60Hz                             |      |          |      |
| 2.5KV   |      |          |      |
| Cool Day Light 6500K±500 & Warm White 2700K±500 |      |          |      |
| >80%  |      |          |      |
| 20,000 Hrs                                      |      |          |      |
| >90% (2000 Hrs)                                 |      |          |      |

## FEATURES

- Easy to install
- Consistent CCT Output
- No flickering, UV/IR & Mercury free
- Lumen maintenance after 2000 Hours → 90%
- Slim & modern design
- Good CRI Level
- Surge voltage protection
- Tested 2000 Hours

## APPLICATIONS



Office



Home



Industry



Hospital



Outlet



Hotel &  
Restaurants



Commercial Spaces

# LED Down Light



The warranty period may vary  
in case of any changes  
to the specifications

#### AVAILABLE COLORS

-  Cool Day Light
-  Warm White
-  Red
-  Blue
-  Green



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## LED Down Light

### Technical Specification

| Watt                  | 7W  |
|-----------------------|---|
| Lumen                 | 560 lm  |
| Shape                 | Round   |
| Efficacy              | ≥80 lm/w  |
| Beam Angle            | 38°   |
| Operating Voltage     | 90-270V AC, 50/60Hz                             |
| Surge Protection      | 2.5KV   |
| Color Temperature     | Cool Day Light 6500K±500 & Warm White 2700K±500 |
| Photometric Code      | Cool Day Light 827/359 & Warm White 865/359     |
| Color Rendering Index | ≥80%  |
| Life Time             | 20,000 Hrs                                      |
| Lumen Maintenance     | >90% (2000 Hrs)                                 |

### FEATURES

- ✔ Easy to install
- ✔ Consistent CCT Output
- ✔ No flickering, UV/IR & Mercury free
- ✔ Lumen maintenance after 2000 Hours 90%
- ✔ Slim & modern design
- ✔ Good CRI Level
- ✔ Surge voltage protection
- ✔ Tested 2000 Hours

### APPLICATIONS



Office



Home



Industry



Hospital



Outlet

Hotel &  
Restaurants

Commercial Spaces



# LED Spot Light



The warranty period may vary in case of any changes to the specifications

## AVAILABLE COLORS

- ☐ Cool Day Light
- ☐ Warm White



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## LED Spot Light

### Technical Specification

| Watt                  | 7W  |
|-----------------------|---|
| Lumen                 | 700±10 lm                                       |
| Shape                 | Round   |
| Efficacy              | ≥100 lm/w                                       |
| Beam Angle            | 38°   |
| Operating Voltage     | 100-250V AC, 50/60Hz                            |
| Surge Protection      | 2.5KV   |
| Color Temperature     | Cool Day Light 6500K±500 & Warm White 2700K±500 |
| Photometric Code      | Cool Day Light 827/359 & Warm White 865/359     |
| Color Rendering Index | ≥80%  |
| Life Time             | 20,000 Hrs                                      |
| Lumen Maintenance     | >90% (2000 Hrs)                                 |

### FEATURES

- ✦ Easy to install
- ✦ Consistent CCT Output
- ✦ No flickering, UV/IR & Mercury free
- ✦ Lumen maintenance after 2000 Hours 90%
- ✦ Slim & modern design
- ✦ Good CRI Level
- ✦ Surge voltage protection
- ✦ Tested 2000 Hours

### APPLICATIONS



Office



Home



Industry



Hospital



Outlet


Hotel &  
Restaurants


Commercial Spaces

# LED BRIGHT FLOOD LIGHT

**IP66**  
WATER RESISTANT

**2 YEARS**  
WARRANTY

The warranty period may vary  
in case of any changes  
to the specifications



Energy Saver



Eco Friendly



Best Quality



Cost Efficient

## LED BRIGHT FLOOD LIGHT

### Technical Specification

| Watt                  | 50W                 | 100W  |
|-----------------------|---------------------|-------|
| Lumen                 | 5000                | 10000 |
| Shape                 | Square              |       |
| Efficacy              | ≥100                |       |
| Beam Angle            | 120°                |       |
| Operating Voltage     | 90-270V AC, 50/60Hz |       |
| Power Factor          | ≥0.5                |       |
| Surge Protection      | 2.5 KV              |       |
| Color Temperature     | Day Light 6500K     |       |
| Color Rendering Index | ≥80%                |       |
| Life Time             | 30,000 Hrs          |       |
| Lumen Maintenance     | ≥90% (2000 Hrs)     |       |

### FEATURES

- Creative design & in-depth technology in TRANSTEC brand flood light, not only make it. At the top level in Bangladesh market but also make the light to be an art work.
- In combination with the environment, it plays a role which is greater than lights.
- High intensity Die-Cast body, better heat dissipation structural material.
- High intensity Tempered glass can resist impact & friction, ensure 95% light refraction.
- Used stainless steel (SS 304) Nuts & Screws which ensure better performance in severe environment
- Painted body after surface treatment process can pass salt spray test of 500 hrs. It ensures better performance in anti-corrosion.

### APPLICATIONS



Factory Security  
Lighting



Rail Station



Toll Plaza



Gas Station



Tennis Court



Car Parking  
Area



# GSS PEARL SERIES



Switching Lifetime  
**40,000+**

Plug-in Lifetime  
**10,000+**

Rotation Lifetime  
**10,000+**

## FEATURES

- Premium look & glossy finish / elegant design.
- Made of Polycarbonate virgin resin.
- Flame retardant.
- Silver cadmium oxide contacts provide high conductivity and anti-weld properties.
- Metals are made of high conductive Copper alloys.
- Safety shutter prevents any accidental shock.
- Shock proof.
- Easy installation & user convenient.



**One Gang One Way**  
Model No: PL-01  
Current: 16A  
Voltage: 250V



**One Gang Two Way**  
Model No: PL-02  
Current: 16A  
Voltage: 250V



**Two Gang One Way**  
Model No: PL-03  
Current: 16A  
Voltage: 250V



**Two Gang Two Way**  
Model No: PL-04  
Current: 16A  
Voltage: 250V



**Three Gang One Way**  
Model No: PL-05  
Current: 16A  
Voltage: 250V



**Four Gang One Way**  
Model No: PL-06  
Current: 16A  
Voltage: 250V



**Bell Push**  
Model No: PL-07  
Current: 16A  
Voltage: 250V



**Fan Dimmer**  
Model No: PL-08  
Power: 500W  
Voltage: 250V



**DP Switch**  
Model No: PL-09  
Current: 32A  
Voltage: 250V



**TV Socket**  
Model No: PL-10  
Connector: F-Type



**Telephone Socket**  
Model No: PL-11  
Socket: CAT3



**Internet Socket**  
Model No: PL-12  
Socket: CAT5E



**2 Pin Socket**  
Model No: PL-13  
Current: 10A  
Voltage: 250V



**Universal Socket**  
Model No: PL-14  
Current: 13A  
Voltage: 250V



**3 Pin Round Socket**  
Model No: PL-15  
Current: 15A  
Voltage: 250V



**10 Pin Multi Function Socket**  
Model No: PL-16  
Current: 13A  
Voltage: 250V



**5 Pin Multi Function Socket**  
Model No: PL-17  
Current: 13A  
Voltage: 250V



**8 Pin Multi Function Socket**  
Model No: PL-18  
Current: 16A  
Voltage: 250V



**5 Pin Multi Function Socket with USB**  
Model No: PL-19  
Current: 13A  
Voltage: 250V



# GSS WHITE GOLD SERIES



Switching Lifetime  
**40,000+**

Plug-in Lifetime  
**10,000+**

Rotation Lifetime  
**10,000+**

## FEATURES

- Premium look & glossy finish / elegant design.
- Made of Polycarbonate virgin resin.
- Flame retardant.
- Silver cadmium oxide contacts provide high conductivity and anti-weld properties.
- Metals are made of high conductive Copper alloys.
- Safety shutter prevents any accidental shock.
- Metal back frame.
- Shock proof.
- Easy installation & user convenient.



**One Gang One Way**  
Model No: WG-01  
Current: 16A  
Voltage: 250V



**One Gang Two Way**  
Model No: WG-02  
Current: 16A  
Voltage: 250V



**Two Gang One Way**  
Model No: WG-03  
Current: 16A  
Voltage: 250V



**Two Gang Two Way**  
Model No: WG-04  
Current: 16A  
Voltage: 250V



**Three Gang One Way**  
Model No: WG-05  
Current: 16A  
Voltage: 250V



**Four Gang One Way**  
Model No: WG-06  
Current: 16A  
Voltage: 250V



**Bell Push**  
Model No: WG-07  
Current: 10A  
Voltage: 250V



**Fan Dimmer**  
Model No: WG-08  
Power: 500W  
Voltage: 250V



**DP Switch**  
Model No: WG-09  
Current: 45A  
Voltage: 250V



**TV Socket**  
Model No: WG-10  
Connector: F-Type



**Telephone Socket**  
Model No: WG-11  
Socket: CAT3



**Internet Socket**  
Model No: WG-12  
Socket: CAT5E



**2 Pin Socket**  
Model No: WG-13  
Current: 10A  
Voltage: 250V



**Universal Socket**  
Model No: WG-14  
Current: 13A  
Voltage: 250V



**3 Pin Round Socket**  
Model No: WG-15  
Current: 15A  
Voltage: 250V



**5 Pin Multi Function Socket with USB**  
Model No: WG-16  
Current: 13A  
Voltage: 250V



**5 Pin Multi Function Socket**  
Model No: WG-17  
Current: 13A  
Voltage: 250V



# GSS GOLD SERIES


 Switching Lifetime  
**40,000+**

 Plug-in Lifetime  
**10,000+**


 Rotation Lifetime  
**10,000+**

## FEATURES

- Premium look & glossy finish / elegant design.
- Made of Polycarbonate virgin resin.
- Flame retardant.
- Silver cadmium oxide contacts provide high conductivity and anti-weld properties.
- Metals are made of high conductive Copper alloys.
- Safety shutter prevents any accidental shock.
- Metal back frame.
- Shock proof.
- Easy installation & user convenient.



**One Gang One Way**  
 Model No: GL-01  
 Current: 16A  
 Voltage: 250V



**One Gang Two Way**  
 Model No: GL-02  
 Current: 16A  
 Voltage: 250V




**Two Gang One Way**  
 Model No: GL-03  
 Current: 16A  
 Voltage: 250V



**Two Gang Two Way**  
 Model No: GL-04  
 Current: 16A  
 Voltage: 250V



**Three Gang One Way**  
 Model No: GL-05  
 Current: 16A  
 Voltage: 250V



**Four Gang One Way**  
 Model No: GL-06  
 Current: 16A  
 Voltage: 250V




**Bell Push**  
 Model No: GL-07  
 Current: 10A  
 Voltage: 250V




**Fan Dimmer**  
 Model No: GL-08  
 Power: 500W  
 Voltage: 250V




**DP Switch**  
 Model No: GL-09  
 Current: 32A  
 Voltage: 250V



**TV Socket**  
 Model No: GL-10  
 Connector: F-Type



**Telephone Socket**  
 Model No: GL-11  
 Socket: CAT3



**Internet Socket**  
 Model No: GL-12  
 Socket: CAT5E



**2 Pin Socket**  
 Model No: GL-13  
 Current: 13A  
 Voltage: 250V



**Universal Socket**  
 Model No: GL-14  
 Current: 13A  
 Voltage: 250V



**3 Pin Round Socket**  
 Model No: GL-15  
 Current: 15A  
 Voltage: 250V



**5 Pin Multi Function Socket with USB**  
 Model No: GL-16  
 Current: 13A  
 Voltage: 250V



**5 Pin Multi Function Socket**  
 Model No: GL-17  
 Current: 13A  
 Voltage: 250V



# GSS OSLO SERIES



Switching Lifetime  
**40,000+**

Plugin Lifetime  
**10,000+**

Rotation Lifetime  
**10,000+**

## FEATURES

- Premium look & glossy finish / elegant design.
- Made of Polycarbonate virgin resin.
- Flame retardant.
- Silver cadmium oxide contacts provide high conductivity and anti-weld properties.
- Metals are made of high conductive Copper alloys.
- Safety shutter prevents any accidental shock.
- Metal back frame.
- Shock proof.
- Easy installation & user convenient.



**One Gang One Way**  
Model No: OS-01  
Current: 16A  
Voltage: 250V



**One Gang Two Way**  
Model No: OS-02  
Current: 16A  
Voltage: 250V



**Two Gang One Way**  
Model No: OS-03  
Current: 16A  
Voltage: 250V



**Two Gang Two Way**  
Model No: OS-04  
Current: 16A  
Voltage: 250V



**Three Gang One Way**  
Model No: OS-05  
Current: 16A  
Voltage: 250V



**Four Gang One Way**  
Model No: OS-06  
Current: 16A  
Voltage: 250V



**Bell Push**  
Model No: OS-07  
Current: 16A  
Voltage: 250V



**Fan Dimmer**  
Model No: OS-08  
Power: 500W  
Voltage: 250V



**DP Switch**  
Model No: OS-09  
Current: 32A  
Voltage: 250V



**TV Socket**  
Model No: OS-10  
Connector: F-Type



**Telephone Socket**  
Model No: OS-11  
Socket: CAT3



**Internet Socket**  
Model No: OS-12  
Socket: CAT5E



**2 Pin Socket**  
Model No: OS-13  
Current: 16A  
Voltage: 250V



**Universal Socket**  
Model No: OS-14  
Current: 13A  
Voltage: 250V



**3 Pin Round Socket**  
Model No: OS-15  
Current: 15A  
Voltage: 250V



**5 Pin Multi Function Socket with USB**  
Model No: OS-16  
Current: 13A  
Voltage: 250V



**5 Pin Multi Function Socket**  
Model No: OS-17  
Current: 13A  
Voltage: 250V



**10 Pin Multi Function Socket**  
Model No: OS-18  
Current: 13A  
Voltage: 250V



# GSS Vanilla Series



Switching Lifetime  
**40,000+**

Plugin Lifetime  
**10,000+**

Rotation Lifetime  
**10,000+**

## FEATURES

- Premium look & glossy finish / elegant design.
- Made of Polycarbonate virgin resin.
- Flame retardant.
- Silver cadmium oxide contacts provide high conductivity and anti-weld properties.
- Metals are made of high conductive Copper alloys.
- Safety shutter prevents any accidental shock.
- Shock proof.
- Easy installation & user convenient.



**One Gang One Way**  
Model No: VS - 01  
Current: 10A  
Voltage: 250V



**One Gang Two Way**  
Model No: VS - 02  
Current: 10A  
Voltage: 250V



**Two Gang One Way**  
Model No: VS - 03  
Current: 10A  
Voltage: 250V



**Two Gang Two Way**  
Model No: VS - 04  
Current: 10A  
Voltage: 250V



**Three Gang One Way**  
Model No: VS - 05  
Current: 10A  
Voltage: 250V



**Four Gang One Way**  
Model No: VS - 06  
Current: 10A  
Voltage: 250V



**Bell Push**  
Model No: VS - 07  
Current: 10A  
Voltage: 250V



**Fan Dimmer**  
Model No: VS - 08  
Power: 500W  
Voltage: 250V



**DP Switch**  
Model No: VS - 09  
Current: 32A  
Voltage: 250V



**TV Socket**  
Model No: VS - 10  
Connector: F-Type



**Telephone Socket**  
Model No: VS - 11  
Connector: CAT3



**Internet Socket**  
Model No: VS - 12  
Socket: CAT6



**2 Pin socket**  
Model No: VS - 13  
Current: 10A  
Voltage: 250V



**3 Pin Universal**  
Model No: VS - 14  
Current: 13A  
Voltage: 250V



**3 Pin Round socket**  
Model No: VS - 15  
Current: 15A  
Voltage: 250V



**5 Pin Multi Function  
Socket with USB**  
Model No: VS - 16  
Current: 13A  
Voltage: 250V



**5 Pin Multi Function**  
Model No: VS - 17  
Current: 13A  
Voltage: 250V



**10 Pin Multi Function**  
Model No: VS - 18  
Current: 13A  
Voltage: 250V



**Blank Plate**  
Model No: VS - 19



# GSS Falcon Series



Switching Lifetime  
**40,000+**

Plugin Lifetime  
**10,000+**

Rotation Lifetime  
**10,000+**

## FEATURES

- Premium look & glossy finish / elegant design.
- Made of Polycarbonate virgin resin.
- Flame retardant.
- Silver cadmium oxide contacts provide high conductivity and anti-weld properties.
- Metals are made of high conductive Copper alloys.
- Safety shutter prevents any accidental shock.
- Shock proof.
- Easy installation & user convenient.



**One Gang One Way**  
Model No: FS - 01  
Current: 16A  
Voltage: 250V



**One Gang Two Way**  
Model No: FS - 02  
Current: 16A  
Voltage: 250V



**Two Gang One Way**  
Model No: FS - 03  
Current: 16A  
Voltage: 250V



**Two Gang Two Way**  
Model No: FS - 04  
Current: 16A  
Voltage: 250V



**Three Gang One Way**  
Model No: FS - 05  
Current: 16A  
Voltage: 250V



**Four Gang One Way**  
Model No: FS - 06  
Current: 16A  
Voltage: 250V



**Bell Push**  
Model No: FS - 07  
Current: 16A  
Voltage: 250V



**Fan Dimmer**  
Model No: FS - 08  
Power: 500W  
Voltage: 250V



**DP Switch**  
Model No: FS - 09  
Current: 32A  
Voltage: 250V



**TV Socket**  
Model No: FS - 10  
Connector: F-Type



**Telephone Socket**  
Model No: FS - 11  
Connector: CAT3



**Internet Socket**  
Model No: FS - 12  
Socket: CAT6



**2 Pin socket**  
Model No: FS - 13  
Current: 10A  
Voltage: 250V



**3 Pin Universal**  
Model No: FS - 14  
Current: 13A  
Voltage: 250V



**3 Pin Round socket**  
Model No: FS - 15  
Current: 15A  
Voltage: 250V



**5 Pin Multi Function Socket with USB**  
Model No: FS - 16  
Current: 13A  
Voltage: 250V



**5 Pin Multi Function**  
Model No: FS - 17  
Current: 13A  
Voltage: 250V




**10 Pin Multi Function**  
Model No: FS - 18  
Current: 13A  
Voltage: 250V



**Blank Plate**  
Model No: FS - 19



# GSS Cosmo Series

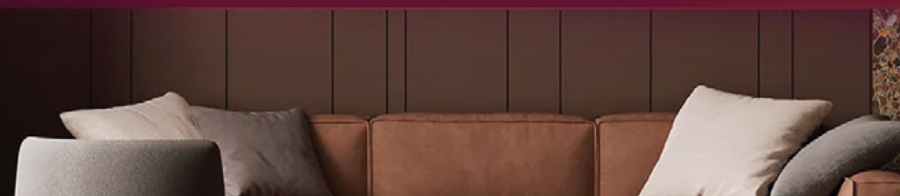

Switching Lifetime  
**40,000+**

Plugin Lifetime  
**10,000+**

Rotation Lifetime  
**10,000+**

## FEATURES

- Premium look & glossy finish / elegant design.
- Made of Polycarbonate virgin resin.
- Flame retardant.
- Silver cadmium oxide contacts provide high conductivity and anti-weld properties.
- Metals are made of high conductive Copper alloys.
- Safety shutter prevents any accidental shock.
- Shock proof.
- Easy installation & user convenient.



**One Gang One Way**  
Model No: CS - 01  
Current: 16A  
Voltage: 250V



**One Gang Two Way**  
Model No: CS - 02  
Current: 16A  
Voltage: 250V



**Two Gang One Way**  
Model No: CS - 03  
Current: 16A  
Voltage: 250V



**Two Gang Two Way**  
Model No: CS - 04  
Current: 16A  
Voltage: 250V



**Three Gang One Way**  
Model No: CS - 05  
Current: 16A  
Voltage: 250V



**Four Gang One Way**  
Model No: CS - 06  
Current: 16A  
Voltage: 250V



**Bell Push**  
Model No: CS - 07  
Current: 16A  
Voltage: 250V



**Fan Dimmer**  
Model No: CS - 08  
Power: 500W  
Voltage: 250V



**DP Switch**  
Model No: CS - 09  
Current: 20A  
Voltage: 250V



**DP Switch**  
Model No: CS - 10  
Current: 45A  
Voltage: 250V



**TV Socket**  
Model No: CS - 11  
Connector : F-Type



**Telephone Socket**  
Model No: CS - 12  
Connector : CAT3



**Internet Socket**  
Model No: CS - 13  
Socket: CAT6



**Two Gang Switch Two Socket**  
Model No: CS - 14  
Current: 16A & 10A  
Voltage: 250V



**Three Gang Switch One Socket**  
Model No: CS - 15  
Current: 16A & 10A  
Voltage: 250V



**2 Pin socket**  
Model No: CS - 16  
Current: 10A  
Voltage: 250V



**3 Pin Universal Socket**  
Model No: CS - 17  
Current: 13A  
Voltage: 250V



**3 Pin Round socket**  
Model No: CS - 18  
Current: A  
Voltage: 250V



**5 Pin Multi Function  
Socket with USB**  
Model No: CS - 19  
Current: 13A  
Voltage: 250V



**5 Pin Multi Function**  
Model No: CS - 20  
Current: 13A  
Voltage: 250V



**10 Pin Multi Function**  
Model No: CS - 21  
Current: 13A  
Voltage: 250V



**Blank Plate**  
Model No: CS - 22

# PIANO SERIES



## PIANO SERIES

### Available Products

|  |   |  |   |
|--|---|--|---|
|   | <b>One Way Switch</b><br>Current: 6A<br>Voltage: 250V |   | <b>Fan Dimmer</b><br>Power: 200W<br>Voltage: 250V |
|   | <b>Bell Push</b><br>Current: 6A<br>Voltage: 250V      |   | <b>Fuse</b><br>Power: 6A<br>Voltage: 250V         |
|  | <b>2 Pin Socket</b><br>Current: 6A<br>Voltage: 250V   |  | <b>Indicator</b><br>Current: 6A<br>Voltage: 250V  |

### FEATURES

- Made of polycarbonate Virgin Resin.
- Flame retardant.
- Wide switch knob for easy operation.
- Silver cadmium oxide contacts provide high conductivity and anti-weld properties.
- Metals are made of high conductive copper alloys.
- Radium indicator.
- Easy installation & user convenient.









# SHINE PIANO SERIES



## SHINE PIANO SERIES

### Available Products

#### Shine Piano Series

|  |   |  |   |
|--|---|--|---|
|   | <b>One Way Switch</b><br>Current: 6A<br>Voltage: 250V |   | <b>Fan Dimmer</b><br>Power: 200W<br>Voltage: 250V |
|   | <b>Bell Push</b><br>Current: 6A<br>Voltage: 250V      |   | <b>Fuse</b><br>Current: 6A<br>Voltage: 250V       |
|  | <b>2 Pin Socket</b><br>Current: 6A<br>Voltage: 250V   |  | <b>Indicator</b><br>Current: 6A<br>Voltage: 250V  |

### FEATURES

- Made of polycarbonate Virgin Resin.
- Flame retardant.
- Wide switch knob for easy operation.
- Silver cadmium oxide contacts provide high conductivity and anti-weld properties.
- Metals are made of high conductive copper alloys.
- Radium indicator.
- Easy installation & user convenient.

# MCB



# MCB

## Available Products



### Single Pole

Breaking Capacity (In): 3kA  
 Current Rating (Ics): 6A, 10A, 16A, 20A,  
 32A, 40A, 63A



### Double Pole

Breaking Capacity (In): 3kA  
 Current Rating (Ics): 16A, 20A, 32A, 40A, 63A



### Triple Pole

Breaking Capacity (In): 3kA  
 Current Rating (Ics): 32A, 40A, 63A

## FEATURES

- Ensure protection against short circuit
- Ensure protection against over current
- Precise trip response
- Compatibility with different circuits
- Compact & easy to install



## PC OTHERS



## PC OTHERS

- Holder Current: 6A
- Plug: 2pin-6A, 3pin-13A & 16A
- Holder & Plug Voltage: 250V

### Available Products



#### Hexagon Holder

- B22
  - E27
- Ceiling Rose



#### Octagon Holder

- B22
  - E27
- Ceiling Rose



#### Round Batten Holder

- B22
- E27



#### Pendant Holder

- B22
- E27



#### 2 Pin Plug

Current: 6A  
Voltage: 250V



#### 3 Pin Plug

Current: 13A  
Voltage: 250V





#### 3 Pin Plug

Current: 16A  
Voltage: 250V

### FEATURES

- Made with High Quality Virgin Resin Materials
- Elegant Design & Durable
- Premium Quality
- Fire Retardant
- Easy Installation
- Anti-Rust Coated Metals that Ensure High Resistance of Rust

# DECORATIVE HOLDER

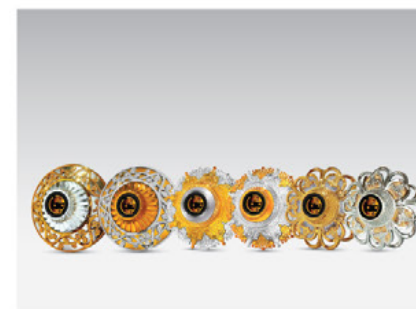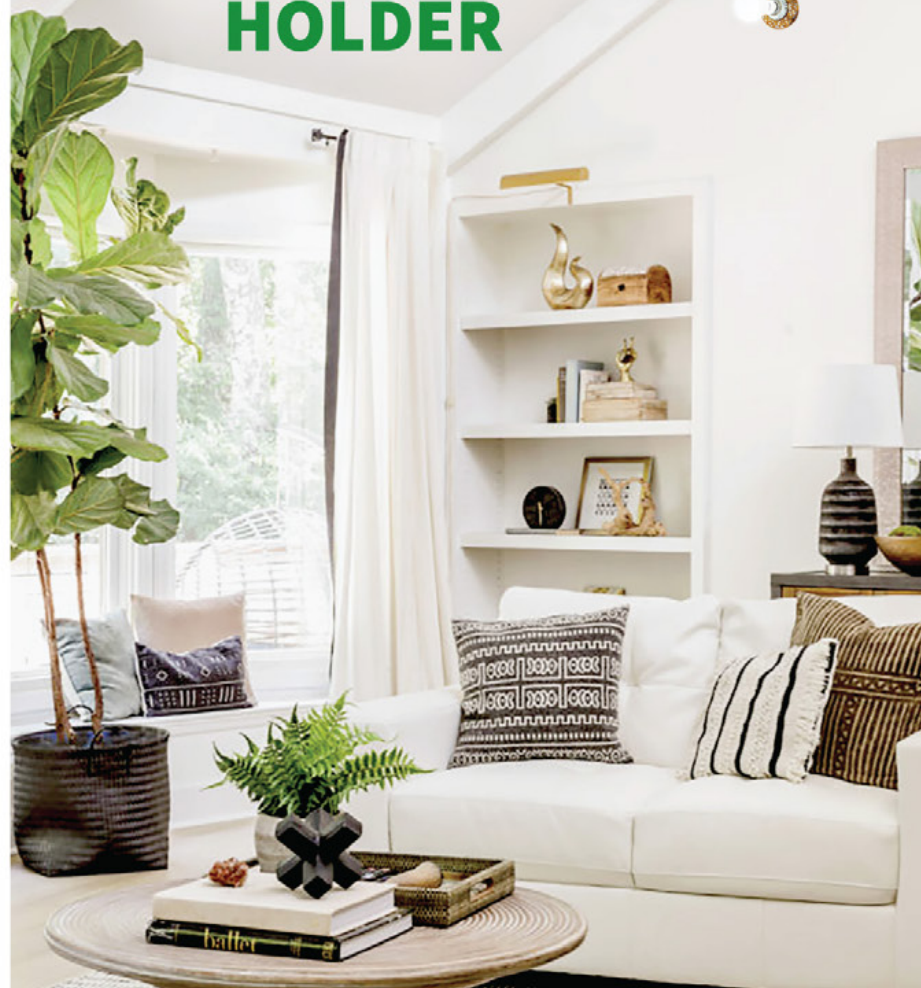

# DECORATIVE HOLDER

- Current: 6A
- Voltage: 250V

## Available Products

### Coral



#### Coral Gold Decorative Holder


- B22
- E27
- Ceiling Rose



#### Coral Silver Decorative Holder


- B22
- E27
- Ceiling Rose

### Star



#### Star Gold Decorative Holder

- B22
- E27
- Ceiling Rose



#### Star Silver Decorative Holder

- B22
- E27
- Ceiling Rose

### Lotus



#### Lotus Gold Decorative Holder

- B22
- E27
- Ceiling Rose



#### Lotus Silver Decorative Holder

- B22
- E27
- Ceiling Rose

## FEATURES

- Made with High Quality Virgin Resin Materials
- Elegant Design & Durable
- Premium Quality
- Fire Retardant
- Easy Installation
- Anti-Rust Coated Metals that Ensure High Resistance of Rust





Model: TR-638  
USB C Type  
Charging



**MOSQUITO BAT**  
(TR-638)


**MOSQUITO BAT**  
(TR-306D)

## MOSQUITO BAT



**Model: TR-638**

AVAILABLE COLORS



**Model: TR-306D**

AVAILABLE COLORS



### Technical Specification

|                        |           |
|------------------------|-----------|
| Rated charging voltage | 5V DC     |
| Rated output voltage   | 3000V DC  |
| Battery capacity       | 400mAh    |
| Charging time          | 3-5 hours |

### FEATURES

- Mosquito killing bat & trap.
- Triple-layered mesh for safety.
- Electric shock & leakage current proof.
- USB C type charging & rechargeable battery.
- LED indicator for charging & working mode.
- Light weight & easy to use.

### DIRECTIONS TO USE

- Must be charged for 6-8 hours before using for the first time.
- To use as a mosquito bat. Slide the side button to "ON 1" position & then press the big grey touch switch on the front.
- To use as a mosquito trap. Slide the side button to "ON 2" position, the UV purple light will be on to work as a trap.
- To charge, slide the side button to "OFF" position & insert USB charger, a LED indicator will light up to indicate charging.
- To clean the dead mosquito stuck in between the nets just tap/shake the mosquito bat few times or use a long hair brush to clean it.
- Do not wipe the mosquito bat with a wet cloth or wash it with water, to avoid any dangerous consequences.

### Technical Specification

|                        |             |
|------------------------|-------------|
| Rated charging voltage | 110-220V AC |
| Rated output voltage   | 3000V DC    |
| Battery capacity       | 400mAh      |
| Charging time          | 6-8 hours   |

### FEATURES

- Triple-layered mesh for safety.
- Electric shock & leakage current proof.
- AC cord type charging & rechargeable battery.
- LED indicator for charging & working mode.
- Lightweight & easy to use.

### DIRECTIONS TO USE

- Must be charged for 6-8 hours before using for the first time.
- To use as a mosquito bat, slide the side button to "ON" position & then press the push button.
- To charge, slide the side button to "OFF" position & insert USB charger, a LED indicator will light up to indicate charging.
- To clean the dead mosquito stuck in between the nets just tap/shake the mosquito bat few times or use a long hair brush to clean it.
- Slide the middle button to the "ON" position to light up the LED light and slide it to "OFF" position to turn off the LED light.
- Do not wipe the mosquito bat with a wet cloth or wash it with water, to avoid any dangerous consequences.

